


1/4" SQ. - 6061-T6 SERRATED RUNG (TYP) WELDED TO STILES

LADDER BODY CONNECTED WITH SPLICE JOIN. SEE TYP. DETAIL FOR FURTHER INFORMATION

LADDER SUPPLIED IN KIT FORM. THE LADDER BASE IS DESIGNED TO BE CUT TO REQUIRED HEIGHT ON-SITE. TOP RUNG MUST BE LEVEL WITH WALKING/WORKING SURFACE OR PLATFORM.


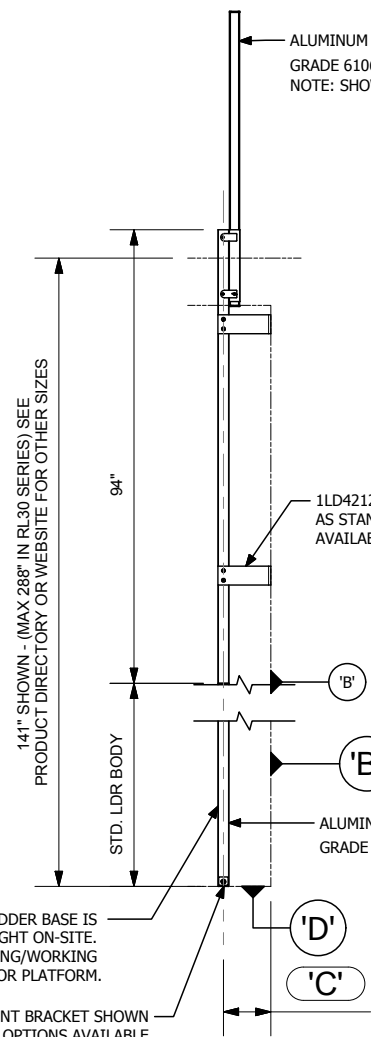


ALUMINUM RETRACTABLE STILES  
GRADE 6106-T6 (2 1/4" X 1 1/2" X 1/8")  
NOTE: SHOWN IN 'OPEN POSITION'

1LD421280 WALL FIXING BRACKET  
AS STANDARD. OTHER FIXING BRACKETS  
AVAILABLE TO MEET SPECIFIC APPLICATIONS

ALUMINUM EXTRUDED STILE  
GRADE 6106-T6 (2 1/4" X 1 1/2" X 1/8")

1LD419S FLOOR MOUNT BRACKET SHOWN  
VARIOUS MOUNTING OPTIONS AVAILABLE

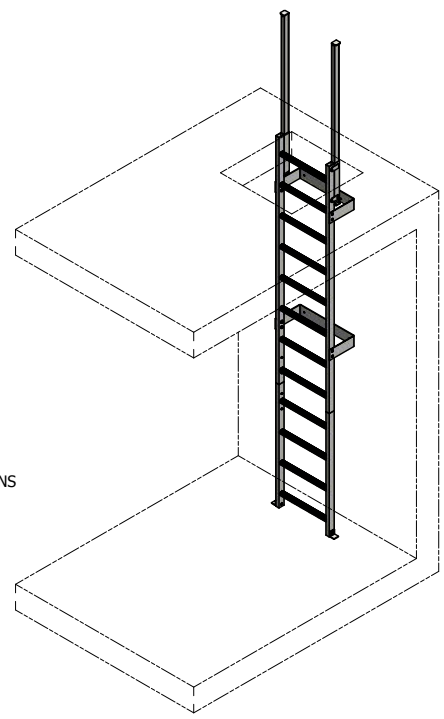

- (A) \_\_\_\_\_  
LOWER LEVEL TO UPPER LEVEL WALKING/WORKING HEIGHT
- (B) \_\_\_\_\_  
WALL SUBSTRATE TYPE (IE: BRICK, CONCRETE BLOCK, METAL SIDING, ETC)
- (C) \_\_\_\_\_  
WALL TO CENTERLINE OF LADDER. OSHA 1910.27(C)(4) STATES THAT THE DISTANCE FROM THE CENTERLINES OF THE RUNGS TO THE NEAREST PERMANENT OBJECT SHALL NOT BE LESS THAN 7". OSHA ALSO REQUIRES A PLATFORM IF THE DISTANCE EXCEEDS 12". PLEASE STATE WIDTH OF ANY GUTTER OR OBJECT. (E.G GUTTER 9" WIDE). FIXFAST WILL ENSURE THE CORRECT BRACKET IS SUPPLIED.
- (D) \_\_\_\_\_  
FLOOR SUBSTRATE TYPE (IE, ROOF MEMBRANE, CONCRETE, METAL ROOF, ETC)

PROJECT REF: \_\_\_\_\_  
CONTRACTOR: \_\_\_\_\_  
APPROVED BY: \_\_\_\_\_  
SIGN HERE: \_\_\_\_\_

| AVAILABLE LADDER KITS |               |
|-----------------------|---------------|
| CODE                  | HEIGHTS UP TO |
| RL34.94               | 94" (7' 10")  |
| RL34.141              | 141" (11'9")  |
| RL34.188              | 188" (15' 8") |
| RL34.235              | 235" (19' 7") |
| RL34.282              | 282" (23' 6") |

| REVISIONS |      |    |     |         |
|-----------|------|----|-----|---------|
| Rev       | Date | By | Rep | Remarks |
| 1         |      |    |     |         |

**FIXFAST USA**  
Maximum safety. Minimum fuss.

FIXFAST USA  
6210S Indianapolis Road  
Whitestown IN 46075 USA  
Tel:- +1 317 769 7710  
Fax:- +1 317 769 5560  
Email:- technical@fixfastusa.com  
Web:- www.fixfastusa.com

**FIXFAST USA CONFIDENTIAL MATERIAL**  
THIS DRAWING IS THE PROPERTY OF 'FIXFAST USA' AND SHALL NOT BE COPIED OR DISCLOSED TO A THIRD PARTY IN WHOLE OR PART WITHOUT THE CONSENT IN WRITING OF 'FIXFAST USA'.

|   |         |                            |     |
|---|---------|----------------------------|-----|
| Description<br><b>Standard Access Ladder With Lead On Handrails</b> |         |                            |     |
| Material  |         |                            |     |
| Product Code<br><b>RL34 SERIES</b>                                  | FAB No. | Drawing No.<br><b>7236</b> | Rev |