


LD407 Retractable Stile Set



The LD407 Retractable Stile Set must be located at the top of the ladder. It is recommended to be mounted on the backside of the ladder. If space is limited, it is permissible to mount it on the front side. Depending on the overall height of the ladder, the bracket position may need to be moved down slightly. Ensure that once the stiles are extended, they are at the compliant height of 42in above the walking/working surface.



Drill a hole through the pre-drilled hole on the top and bottom of the retractable stile bracket and through the side of the ladder stile. Insert the 5/16in x 2 1/4in S/S carriage bolts and fasten. If required, use a rubber mallet to ensure the bolt head is snug. Insert the nut caps. Repeat this step for the second stile set.

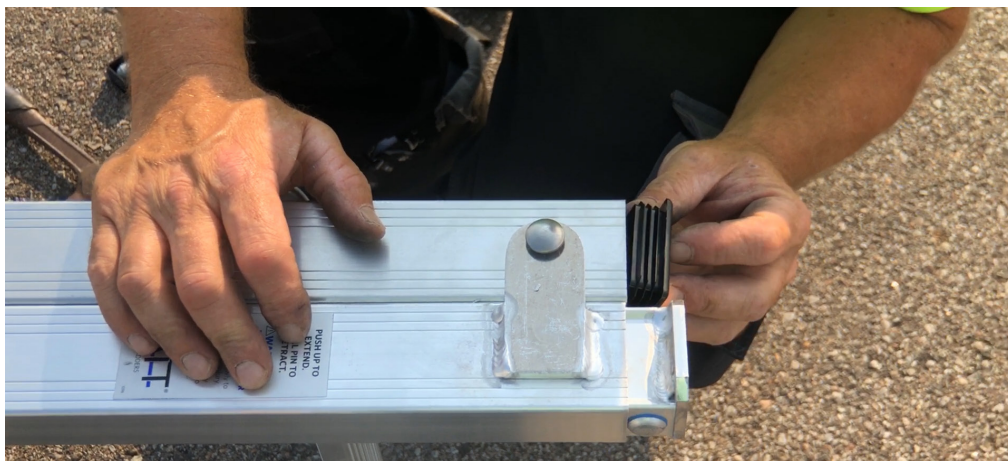

Insert end cap into the top of the ladder stile. Repeat previous steps for other side of the ladder body.