


PROJECT REF: _____
 CONTRACTOR: _____
 APPROVED BY: _____
 SIGN HERE: _____

AVAILABLE LADDER KITS	
CODE	HEIGHTS UP TO
RL35.047	47in (3ft, 11in)
RL35.094	94in (7ft, 10in)
RL35.141	141in (11ft, 9in)
RL35.188	188in (15ft, 8in)
RL35.234	234in (9ft, 6in)
RL35.283	283in (23ft, 7in)

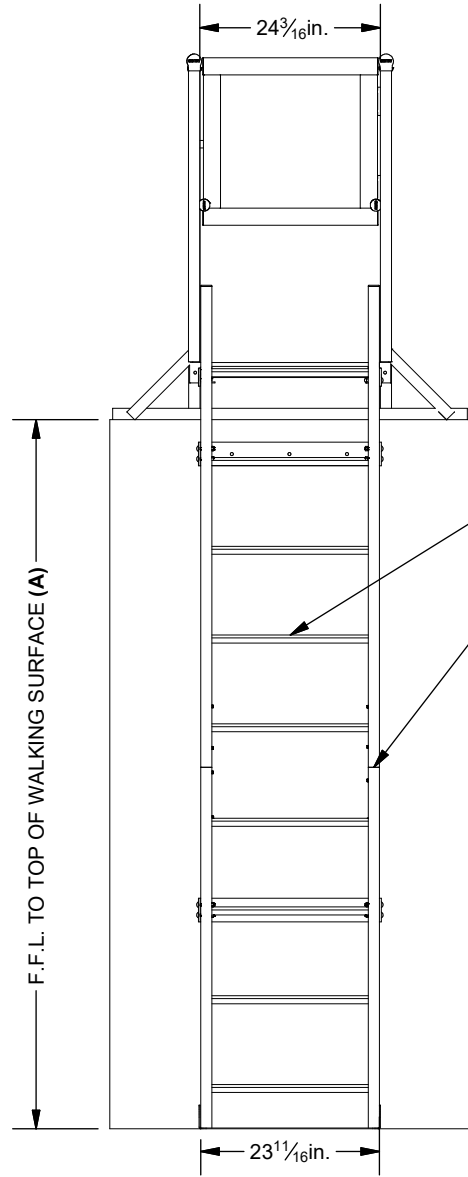

FRONT VIEW

1-1/4in SQ. SERRATED RUNG (TYP)
 ALUMINUM 6106-T6, WELDED TO STILES
 LADDER BODY CONNECTED WITH
 SPLICE JOINT SEE TYP. DETAIL FOR
 FURTHER INFORMATION


LD421.280 WALL FIXING BRACKET AS STANDARD
 OTHER FIXING BRACKETS AVAILABLE TO MEET
 SPECIFIC APPLICATIONS.

LADDER SUPPLIED IN KIT FORM. LADDER BASE IS DESIGNED TO BE
 CUT TO REQ. HEIGHT ON-SITE. TOP RUNG MUST BE LEVEL WITH
 WALKING/WORKING SURFACE OR PLATFORM.

LD419F NON-PENETRATING BASE PLATE
 VARIOUS MOUNTING OPTIONS AVAILABLE

2-1/4in x 1-1/2in x -1/8in LADDER STILE
 ALUMINUM 6106-T6

2in ROUND TOPRAIL TUBE, ALUMINUM 6005-T5
 (2) 3/4in SS SELF TAPPING SCREWS PER POST
 1-5/8in ROUND MIDRAIL TUBE, ALUMINUM 6005-T5
 (2) 2in SS SELF TAPPING SCREWS PER POST

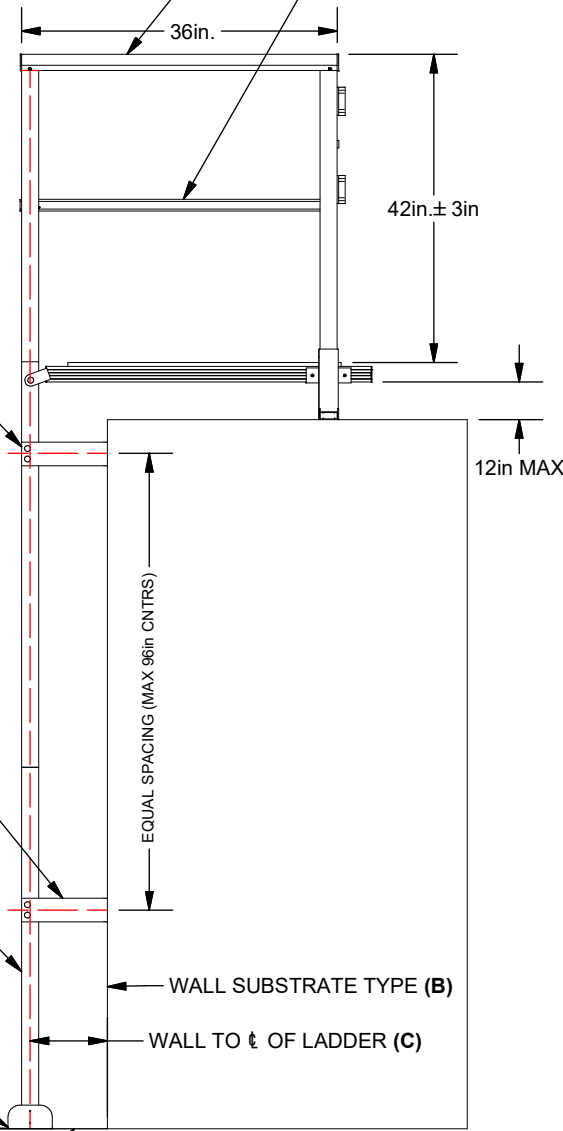


WALL SUBSTRATE TYPE (B)

WALL TO CL OF LADDER (C)


FLOOR SUBSTRATE TYPE (D)

LADDER RUNG

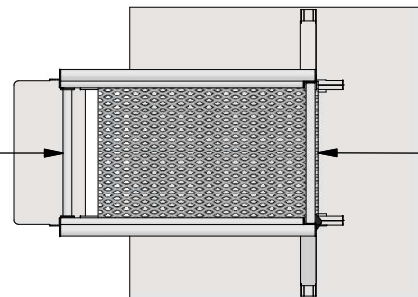

TOP VIEW

1/2in THKMESH TO PLATFORM
 SURFACE, RIBBED FINISH
 ALUMINUM 6063-T4

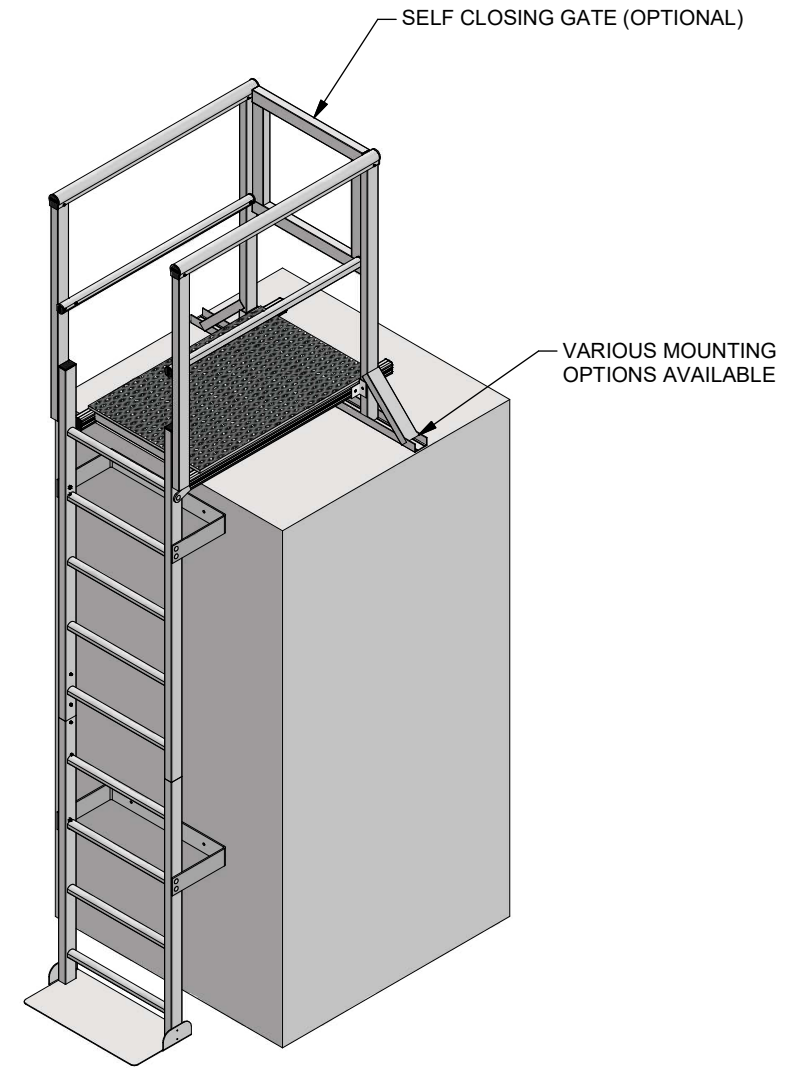


VARIOUS MOUNTING
 OPTIONS AVAILABLE

SELF CLOSING GATE (OPTIONAL)

- A** _____
LOWER LEVEL TO UPPER LEVEL WALKING/WORKING HEIGHT
- B** _____
WALL SUBSTRATE TYPE (I.E BRICK, CONCRETE BLOCK, METAL SIDING, ETC)
- C** _____
WALL TO CENTERLINE OF LADDER. OSHA 1910.23(D)(2) STATES THAT THE
DISTANCE FROM THE CENTERLINE OF THE RUNGS TO THE NEAREST
PERMANENT OBJECT SHALL NOT BE LESS THAN 7in. OSHA ALSO REQUIRES A
PLATFORM IF THE DISTANCE EXCEEDS 12in. PLEASE STATE WIDTH OF ANY
GUTTER OR OBJECT (E.G. GUTTER 9in WIDE). FIXFAST WILL ENSURE THAT THE
CORRECT BRACKET IS PROVIDED
- D** _____
FLOOR SUBSTRATE TYPE (I.E. ROOF MEMBRANE, CONCRETE, METAL ROOF, ETC.)

DRN:	DATE:
SJC	03/11/2022
CHK:	DATE:
END	
APP:	DATE:
WJL	



SCALE 1 / 48			UNTOLERANCED DIMENSIONS		
DIMENSION	DIAMETER	LENGTH	DIMENSION	DIAMETER	LENGTH
0 - 250mm	± 0.25mm	± 0.5mm	250 - 750mm	± 0.50mm	± 1.0mm
> 750mm	± 0.75mm	± 1.5mm			

FIXFASTUSA
 3921 Perry Blvd.
 Whitestown, IN. 46077
 T +1 888 637 7872
 E sales@fixfastusa.com
 W www.fixfastusa.com

Maximum safety. Minimum fuss.
 THIS DRAWING REMAINS THE PROPERTY OF FIXFAST USA®
 AND MAY NOT BE CHANGED WITHOUT WRITTEN PERMISSION

DESCRIPTION VERTICAL LADDER WITH 3ft WALKWAY		SHT # 1/1
MATERIAL ALUMINUM	FINISH MILL FINISH	SIZE B
DWG No. 202203-78	PRODUCT CODE RL35	REV 01

01	03/11/2022	SJC	WJL	ISSUED FOR RELEASE COMMENTS
REV	DATE	BY	APP	