


PROJECT REF: _____
 CONTRACTOR: _____
 APPROVED BY: _____
 SIGN HERE: _____

AVAILABLE LADDER KITS	
CODE	HEIGHTS UP TO
RL21.53	53" (4' 5")
RL21.100	100" (8' 4")
RL21.147	147" (12' 3")

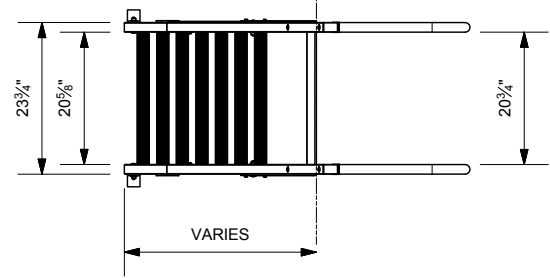

- (A) LOWER LEVEL TO UPPER LEVEL WALKING/WORKING HEIGHT
- (B) WALL SUBSTRATE TYPE (IE: BRICK, CONCRETE BLOCK, METAL SLIDING, ETC)
- (C) WALL TO CENTERLINE OF LADDER. OSHA 1910.27(C)(4) STATES THAT THE DISTANCE FROM THE CENTERLINES OF THE RUNGS TO THE NEAREST PERMANENT OBJECT SHALL NOT BE LESS THAN 7". OSHA ALSO REQUIRES A PLATFORM IF THE DISTANCE EXCEEDS 12". PLEASE STATE WIDTH OF ANY GUTTER OR OBJECT. (E.G. GUTTER 9" WIDE). FIXFAST WILL ENSURE THE CORRECT BRACKET IS SUPPLIED
- (D) FLOOR SUBSTRATE TYPE (IE. ROOF MEMBRANE, CONCRETE, METAL ROOF, ETC)

REVISIONS				
Rev	Date	By	Rep	Remarks
1	27/05/2016	RP	AG	Released
2	30/05/2016	RP	WL	Released

Maximum safety. Minimum fuss.

FIXFAST USA
 6210S Indianapolis Road
 Whitestown IN 46075 USA
 Tel:- +1 317 769 7710
 Fax:- +1 317 769 5560
 Email:- technical@fixfastusa.com
 Web:- www.fixfastusa.com

FIXFAST USA CONFIDENTIAL MATERIAL
 THIS DRAWING IS THE PROPERTY OF 'FIXFAST USA' AND SHALL NOT BE COPIED OR DISCLOSED TO A THIRD PARTY IN WHOLE OR PART WITHOUT THE CONSENT IN WRITING OF 'FIXFAST USA'.

Description Mini Fixed Ladder with Angled Handrails			
Material			
Product Code RL21 SERIES	FAB No.	Drawing No. 7033	Rev